

# ENECLAD<sup>®</sup> CFS

## Clear Floor Sealer

**Prime, seal & dust-proof & concrete surfaces in one simple step.**

- **No Odor**
- **100% Solids**
- **Excellent Abrasion & Impact Resistance**
- **Easy to Clean**
- **Safe & Simple to Use**

**ENECLAD<sup>®</sup> CFS** is a two-component, 100% solids, clear concrete sealer that is virtually odor-free. It has been specifically formulated to provide outstanding sealing and dust-proofing for all types of cement and mineral substrates.

**ENECLAD<sup>®</sup> CFS** is very easy to apply by roller, brush or rubber squeegee. It penetrates and seals porous concrete providing a hard wearing, non-dusting, easy-to-clean surface.

**ENECLAD<sup>®</sup> CFS** exhibits excellent abrasion and impact resistance. It holds up to most industrial cleaners, lubricants and common maintenance chemicals.



### Bonds to...

- **Concrete • Marble • Stone •**
- **Brick • Metal • Terrazzo •**
- **Slate • Quarry Tiles • Pavers •**
- **Wood**



**ENECON<sup>®</sup> Corporation**  
The Fluid Flow  
Systems Specialists.

[www.enecon.com](http://www.enecon.com)

Toll Free: 888-4-ENECON (888-436-3266)

Tel: 516 349 0022 · Fax: 516 349 5522

[info@enecon.com](mailto:info@enecon.com)

6 Platinum Court · Medford, NY 11763-2251

## Technical Data

Volume capacity per kg.	55 in <sup>3</sup> / 900 cc	
Mixed density	0.040 lbs per in <sup>3</sup> / 1.11 gm per cc	
Coverage rate per kg.	125 ft <sup>2</sup> / 11.6 m <sup>2</sup>	
3 mil /75 microns	Indefinite	
Shelf life	100%	
Volume solids	100%	
Mixing ratio	Base	Activator
By volume	2	1
By weight	2.4	1

## Working Life & Cure Times

Ambient Temperature	Working Life	Light Load	Full Mechanical
41°F 5°C	2 hrs	3 days	7 days
59°F 15°C	40 min	10 hrs	3 days
77°F 25°C	20 min	5 hrs	2 days
86°F 30°C	15 min	3 hrs	1 day

Physical Properties	Typical Values		Test Method
Compressive strength	14,000 psi	980 kg/cm <sup>2</sup>	ASTM D-695
Flexural strength	9,500 psi	665 kg/cm <sup>2</sup>	ASTM D-790
Hardness-Shore D	80		ASTM D-2240
Tensile shear adhesion			
Steel	3,000 psi	210 kg/cm <sup>2</sup>	ASTM D-1002
Adhesion - to prepared cementitious surfaces is greater than the cohesive strength of the substrate.			

## Chemical Resistance

Acetic acid (0-5%)	G	Methyl alcohol	G
Acetone	G	Methyl ethyl ketone	G
Ammonia solution (0-10%)	EX	Nitric acid (0-10%)	G
Aviation fuel	EX	Palmitic acid	EX
Butyl alcohol	G	Phosphoric acid (0-5%)	EX
Calcium chloride	EX	Phosphoric acid (5-10%)	G
Crude oil	EX	Potassium chloride	EX
Diesel fuel	EX	Propyl alcohol	G
Ethyl alcohol	G	Sodium chloride	EX
Gasoline	EX	Sodium hydroxide	EX
Heptane	EX	Sulfuric acid (0-50%)	G
Hydrochloric acid (0-10%)	EX	Tannic acid	EX
Hydrochloric acid (10-20%)	G	Toluene	G
Kerosene	EX	Transformer oil	EX
Lactic acid (0-10%)	G	Xylene	EX

EX - Suitable for most applications including immersion.  
G - Suitable for intermittent contact, splashes, etc.

# Using ENECLAD® CFS

**Surface Preparation** - ENECLAD® CFS should only be applied to clean, firm, dry and well roughened surfaces.

1. Remove all loose material and surface and sub-surface contamination.
2. Depending on the surface, solvent clean and / or remove contamination by abrasive blasting, steam cleaning, pressure washing, or other suitable means.
3. After removing all surface and sub-surface contamination, flush the area as necessary and allow to dry completely.

**Mixing & Application** - For your convenience, the ENECLAD® CFS Base and Activator have been supplied in precisely measured quantities to simplify mixing of full units. Should less than a full unit quantity of material be required for a particular application, a partial mix can be accomplished by mixing 2 parts Base to 1 part Activator by volume (2:1, v/v).


While hand mixing is possible, the use of a mechanical mixing device such as a paint mixer in an electric drill or other suitable device will accelerate the mixing process. Pour the entire contents of the Activator container into the Base container and mix the liquids together thoroughly. Once mixed, the unit should be poured into smaller containers and / or roller pans to prolong its working life. Apply the mixed ENECLAD® CFS to the surface using brushes and / or rollers. For large floor areas, long handled roller sets should be used to ease the application. Regardless of the application device / method, press the material in well to eliminate entrapped air and insure thorough contact with the surface.

**Health & Safety** - Every effort is made to insure that ENECON® products are as simple and safe to use as possible. Normal industry standards and practices for housekeeping, cleanliness and personal protection should be observed.

Please refer to the detailed MATERIAL SAFETY DATA SHEETS (MSDS) supplied with the material (also available on request) for more information.

**Cleaning Equipment** - Wipe excess material from tools immediately. Use acetone, MEK, isopropyl alcohol or similar solvent as needed.

**Technical Support** - The ENECON® engineering team is always available to provide technical support and assistance. For guidance on difficult application procedures or for answers to simple questions, call your local ENECON® Fluid Flow Systems Specialist or the ENECON® Engineering Center.

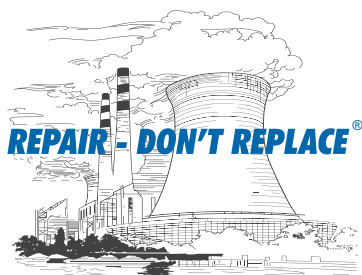

All information contained herein is based on long term testing in our laboratories as well as practical field experience and is believed to be reliable and accurate. No condition or warranty is given covering the results from use of our products in any particular case, whether the purpose is disclosed or not, and we cannot accept liability if the desired results are not obtained.

Copyright © 2014 by ENECON® Corporation. All rights reserved. No part of this work may be reproduced or used in any form or by any means - graphic, electronic or mechanical including photocopying, recording, taping or information storage and retrieval systems - without written permission of ENECON® Corporation.